
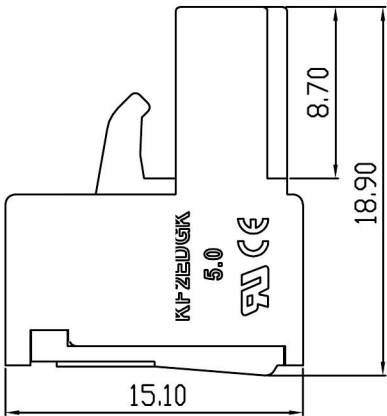
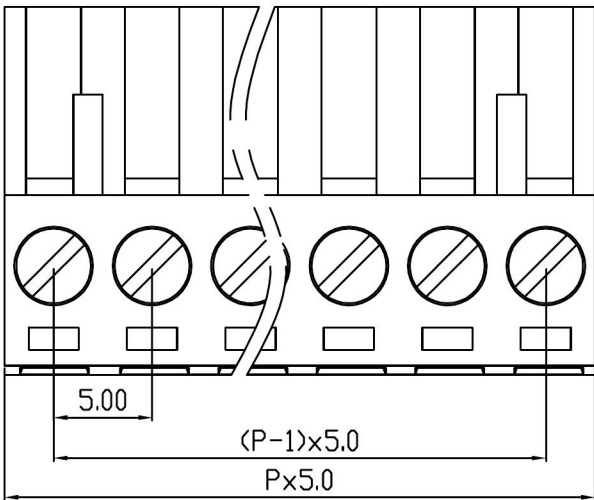
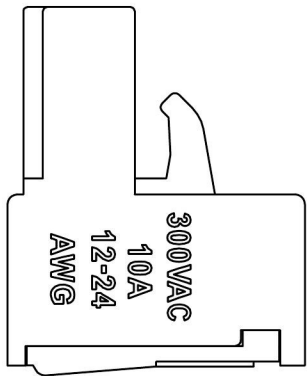


linear dimension(Tolerances Standard GB/T 14486-2008)								—		
variable range	to 6	over 6 to 10	over 10 to 30	over 30 to 60	over 60 to 100	over 100 to 160	over 160 to	to 10	over 10 to 100	over 100 to
tolerance	±0.20	±0.30	±0.50	±0.70	±1.00	±1.30	±1.60	0.10	0.30	0.60

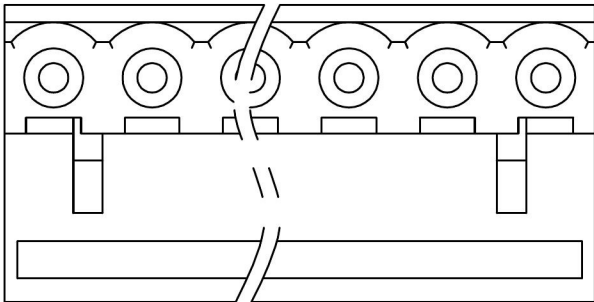

REVISION RECORD				
REV.	DESCRIPTION	ECN No.	APPROVED	DATE
A	新发行		CLF	21.12.15

UL/CUL 技术 参数						
UL/CUL Technical Data						
等 级	Use Group	B	C	D		
额定电压	Rated Voltage [V]	300	-	300		
额定电流	Rated Current [A]	10	-	10		
接线范围	Wire Range	24-12				
单/多芯线	Solid/Stranded [AWG]					
耐电压	Withstanding Voltage	AC1600V/1Min				
IEC 技术参数						
IEC Technical Data						
过电压类别	Overvoltage Category	III	III	II		
污染等级	Contamination Class	3	2	2		
额定电压	Rated Voltage [V]	-	320	630		
额定电流	Rated Current [A]	-	15	15		
额定冲击电压	Impulse withstand voltagea [KV]	-	4.0	4.0		
导线截面积					Conductor cross section	
硬质/柔性导线	Solid/ flexible [mm²]	2.5				
材料 Material						
绝缘材料	Insulation Material	热塑性材料 Thermoplastic				
导体材料	Contacto Material	铜合金 Copper alloy				
导体表面镀层	Contactive Coating	镀镍 Ni plated				
一般参数 Other Data						
间距: Pitch	[mm]	5.0				
极数: Poles	[P]	2-24				
剥线长度: Stripping Length	[mm]	7-8				
螺丝: Screw/扭矩 Torque(Max)	[N.m]	M2.5/0.4				
工作温度: Operating temperatur	[°C]	-40~+105				
引针尺寸: Pin Dimensions	[mm]	-				
PCB板孔径: PCB Hole Diameter	[mm]	-				

DES.	LQQ	DATE	21.12.15
CHK.	BY	DATE	21.12.15
APP.	CLF	DATE	21.12.15

单位 / UNITS	mm	尺寸 / SIZE	A4	比例 / SCALE	1:1
------------	----	-----------	----	------------	-----

YIHENTRA
TECHNICAL DRAWING

第三视角/THIRD ANGLE PROJECTION		版本 / REV	A
		名称 / TITLE	KF2EDGK-5.0